


G2 Dry-Contact Input Card

00BA2400

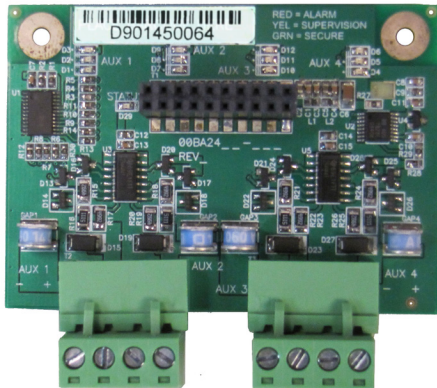

Description

The G2 dry-contact input card provides four additional auxiliary inputs to a compatible Senstar device, including the FlexZone processor and the Senstar LM100 Gateway.

Not compatible with "Gen1" devices (OmniTrax, XField, and 16I/O).

Specifications

- Inputs are programmable for supervision type, resistor value(s), and filtering
- Can be used in conjunction with a communications card, a wireless receiver card, or a G2 relay output card
- Two removable dual-contact connectors
- Size: 76 x 67 x 18 mm (3.0 x 2.4 x 0.7 in)
- Weight: 38 g (1.3 oz)
- Operating temperature: -40 to 70 °C (-40 to 158 °F)
- Conformally coated

