

# MX-7000 Silver Network Integration Software

## Support for Silver Network Fence and Microwave Sensors




### FEATURES AND BENEFITS

- Control and monitor FlexZone®-4, Senstar LM100™, UltraWave™ and UltraLink™ sensors from existing MX-7000 units
- No additional MX-7000 hardware required
- Supports up to 4 alarm zones from each FlexZone-4 or Senstar LM100 processor/gateway
- Monitor up to 30 Silver Network™-based devices in a single network loop
- Supports 6 UltraLink dry-contact inputs (map to alarm, trouble, and tamper states of two MX-7000 zones)
- Loop communications via Silver Network Interface Unit (SNIU) or two Mini-SNIU USB to 422/fiber converters
- Part number: J9SW0501 (MX-7000 Silver Network driver)
- Requires MX-7000 software version J9SW0500-128 or above

The MX-7000 Silver Network integration software enables support for FlexZone-4, Senstar LM100, UltraWave and UltraLink sensors on MX-7000 series control units. The added functionality is software-based and does not require upgrades to the existing MX-7000 hardware.

With Silver Network support, sites can upgrade their legacy perimeter intrusion detection systems while keeping the existing MX-7000 control units and connected security management system (SMS) in place. Existing MX-7000 loop cards and their associated field devices can be retained and controlled in parallel with new Silver Network devices. The maximum zone capacity is determined by the number of MX-7000 front-panel displays – single-display units can control up to 20 zones while dual-display units can control up to 60 zones.

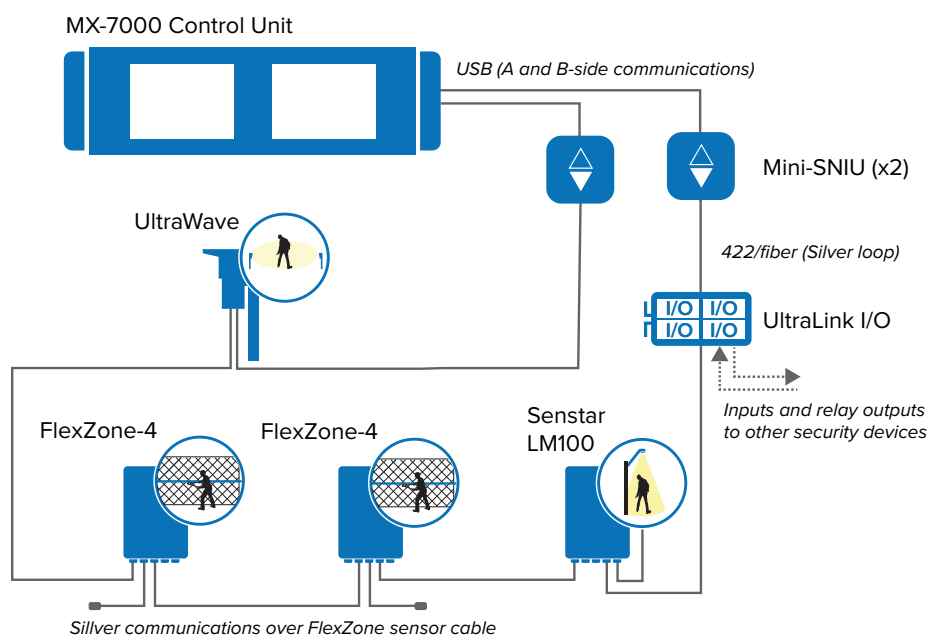

MX-7000 Silver Network Integration Example

[info@senstar.com](mailto:info@senstar.com) • [senstar.com](http://senstar.com)