

# PAS

## Personal alarm system for emergency response


### Features & Benefits ▼

- Immediate and accurate location of an individual in distress
- Timely response to an individual in distress
- Omni-directional reflective ultrasonic signal ensures reception of alarm signal
- Modulated ultrasonic signal results in very few false alarms
- Ultrasound does not penetrate walls - alarms can be localized to a given room
- Personal Alarm Transmitter (PAT) types:
  - Standard PAT (PAT/S), push button activated
  - PAT/MD, push button or man-down activated
  - PAT/S or PAT/MD can have push button replaced with pull-pin
  - Compact PAT (PAT/C), push button or pull-ring activated
- Audible low-battery warning on transmitter
- Rugged design for reliable operation
- Integrates easily with overall security management systems
- Low power transmitters for long battery life
- Receiver closes relay on alarm - simple to integrate
- Variable range to 30 m (100 ft.) diameter
- Multiple receivers can be mounted in proximity for large area coverage

### LIFE SAFETY / DURESS PRODUCTS

#### DESCRIPTION

**PAS** (Personal Alarm System) is an ultrasonic emergency notification / communication system. The exact location of an individual moving throughout a facility is immediately determined when he or she activates their Personal Alarm Transmitter (PAT) device. Through integration with an overall security management system, the location of the individual requiring assistance can be graphically represented on a map-type display at a central location. One or more receivers are installed in each room or hallway that the system is required to cover.

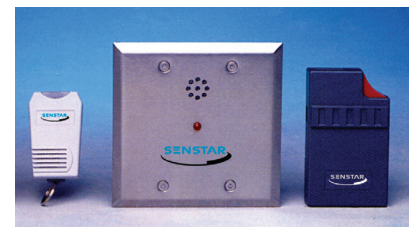

#### APPLICATION

PAS transmitters are discreet, compact and rugged and can be worn on the belt either with a belt clip or in a holster, or as a pendant. Transmitter activation can be through: button press, pull-pin, pendant pull-ring or self-activation in a man-down situation. Receivers are flush-mounted in the wall or ceiling and provide an alarm output, auxiliary alarm output and a visible LED that illuminates to indicate that an alarm has been received.

**HOW IT WORKS**

Unlike radio signals (RF), ultrasonic signals do not penetrate walls, ceilings or floors. Therefore, the transmission / reception is confined to the immediate area of the transmitter and there is no confusion regarding where response should be sent. PAS is based on ultrasonic technology to ensure that location identification is accurate since there is no “bleeding” of signal between walls or floors.

The ultrasonic transmission is modulated and receivers will only alarm when they receive a transmission containing two set frequencies in an established pattern. This eliminates false alarms from items such as keys, metallic items, HVAC systems as it is extremely unlikely for the same modulated frequency pattern to be duplicated. Upon activation, the transmitter carried by an individual emits a continuous ultrasonic signal. The signal is omni-directional, eliminating the need to point or direct the transmission.

**PAS TRANSMITTERS**

The PAT is activated by pushing a latching alarm button which has been specifically designed to prevent accidental activation. Additional methods are available as options: pendant pull ring, pull-pin and “man down”. The “man down” provides automatic transmission whenever an individual is in a prone position (greater than 60° from vertical). In order to prevent accidental transmissions, a warning tone is emitted first and allows a 4 second time delay to correct the transmitter position before an alarm is sent. A breakaway lanyard is supplied with the PAT/C (compact unit).

PAT housings are made from rugged Lexan™ cases. Sturdy pocket / belt clips provide a variety of carrying positions. An optional holster is available for the standard PAT (PAT/S) and PAT with man-down feature (PAT/MD) for wearing on a service belt. A lithium battery is included with each transmitter along with a special tool to gain entrance to the battery compartment. An audible tone is emitted when the battery runs low; it will sound for several days. All transmitters are interchangeable within the system.

**PAS RECEIVERS**

The 03RM receiver is the receiving unit that decodes the modulated ultrasonic signal emitted by the PAT transmitter. An alarm contact, auxiliary contact and LED latch each time an alarm is received. They remain latched when an activated transmitter is within range. The latching condition is held for 5 seconds after the transmitter is deactivated.

Receiving range is factory adjusted for a nominal distance of 15 m (50 ft.) radial, 30 m (100 ft.) diameter. This normally needs no adjustment but can be field adjusted if required. The red alarm LED assures the user that the transmitter signal has been received and the alarm message has been sent.

**PAT TEST UNIT**

The PAT test unit is designed specifically for use with the Personal Alarm Transmitters (PAT/S, PAT/C). It allows customers to regularly test the PAT units and hence maintain confidence in the operation of the system.

**TECHNICAL SPECIFICATIONS**

**PAT/S (STANDARD TRANSMITTER)**

**Dimensions:** 9.7 H x 6.1 W x 2.3 D cm (3.8 x 2.4 x 0.9 in.)

**Weight:** 114 g (4 oz.)

**Color:** Dark gray with red button

**Activation:** Latching push switch, optional man-down or optional pull-pin

**Pocket clip:** Molded Lexan® - moveable for left or right access

**Battery:** 9 V lithium

**Estimated battery life:** 5 year shelf, 1 year of operation

**PAT/C (COMPACT TRANSMITTER)**

**Dimensions:** 6.04 H x 3.8 W x 2.1 D cm (2.4 x 1.5 x 0.8 in.)

**Weight:** 43 g (1.5 oz.)

**Color:** Light gray with dark gray button

**Activation:** Latching push button and pendant pull-ring

**Pocket clip:** Stainless steel

**Battery:** 9 V lithium pack

**Estimated battery life:** 5 year shelf, 1 year of operation

**RECEIVER COMMON FEATURES (ALL MODELS)**

**Connection:** Plug-in terminal block

**Alarm contacts:** Alarm and auxiliary relays, NO or NC

**Alarm LED:** Red

**Tamper switch:** 2 NC reed switches (0.25 A @ 12 VDC)

**Enclosure requirements (interior):** 10.2 cm x 5.4 cm (4 in. x 2.1 in.) deep electrical box (not supplied) flush or recessed with plaster ring

**Enclosure requirements (exterior):** 2 gang weatherproof box with gasket (supplied with WP units)

**Power requirement:**

- Receiver: 40 mA max at 12 to 48 VDC
- Heater unit: 0.5 A at 12 VDC, 1.0 A at 24 VDC

PART	MODEL	DESCRIPTION
02-200001-SMT3	PAT/S	PAT - push button activation includes 9V lithium battery
02-200001-SMT4	PAT/C	Compact PAT - push button activation includes 3-3V lithium battery and lanyard attachment
02-200001-MD3	PAT/MD	PAT/S with man-down switch
T0MD0100	HOLSTER	Leather holster for PAT/S and PAT/MD units
02-200005	PTU	PAT test unit
02-200005-1	PTU/C	PAT/C test unit
LAN-B		Safety lanyard with clip
02-201500	03RM	Receiver - standard
J9DA0120		Manuals - CD includes all PAS manuals

Specifications are subject to change without prior notice.

