


## FlexZone Processor



### G6EM0101/G6EM0102

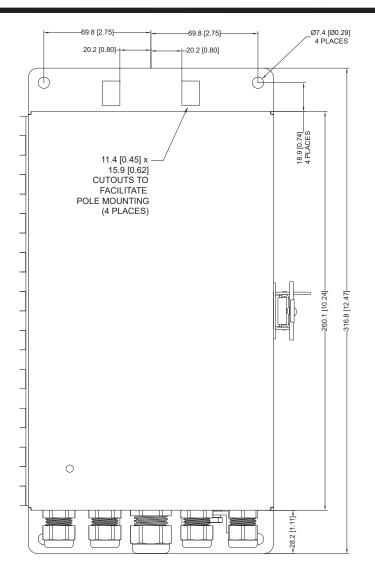

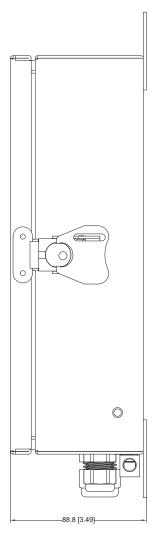



# FLEXZONE SEE PRODUCT GUIDE G6DA102-001 FOR SPECIFICATIONS AND INSTALLATION INFORMATION

#### Material Specifications:

Sheet Aluminium, Type 5052-H34 14GA (1.62 [0.064] thick), Mounting flanges are 14GA (1.62 [0.064] THICK)

First finish process: Clear Irridite (Chromate Conversion Coating) Per MIL STD MIL-C-5541

Final finish process: Grey Polyester Powder Paint 3-5 MILS thickness

Hardware: all hardware used is 300 series stainless Steel

### info@senstar.com • senstar.com