

Multi-Mode Fiber Optic Comm Card

00BA0301

Description

The Silver Network Multi-Mode Fiber Optic communications card enables compatible devices like OmniTrax or XField to communicate with the Network Manager software via a multi-mode fiber optic interface.



Not compatible with “Gen2” devices (FlexZone, Senstar LM100, FiberPatrol FP400 or UltraWave).

Specifications

- Operating wavelength: 820 nm
- Optical power budget: 8 dB
- Connectors: ST (x4), compatible with 50/125 um, 62.5/125, 100/140 um, and 200 um HCS® multi-mode fiber
- Size: 78 x 124 x 18 mm (3.1 x 4.9 x 0.7 in) (not including connectors)
- Weight: 61 g (2.8 oz)
- Operating temperature: -40 to 70 °C (-40 to 158 °F)

Regulatory Compliance

- CE
- FCC 47 CFR Part 15, Subpart B
- REACH

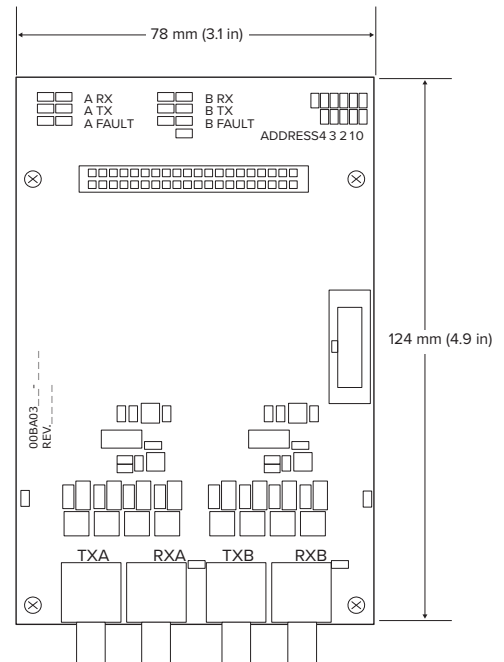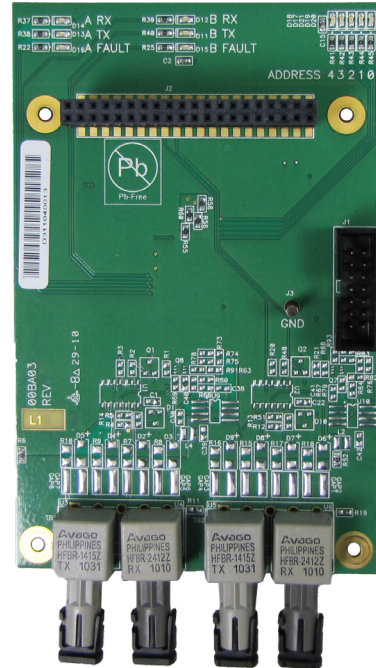

See the OmniTrax or XField Datasheet for a full system description.

info@senstar.com • senstar.com