

Relay Output Card

00BA0400


Description

The relay output card provides eight additional relay outputs for a compatible Senstar device, including the OmniTrax and XField processors. The mounting hardware (4 machine screws and offset posts) is included.

Not compatible with "Gen2" devices (FlexZone, Senstar LM100, FiberPatrol FP400 or UltraWave).


Specifications

- 8 Form-C output relays, 1.0A at 30 VDC
- Two removable dual-contact connectors
- Size: 78 x 104 x 31 mm (3.1 x 4.1 x 1.2 in)
- Weight: 131 g (4.6 oz)
- Operating temperature: -40 to 70 °C (-40 to 158 °F)
- Conformally coated

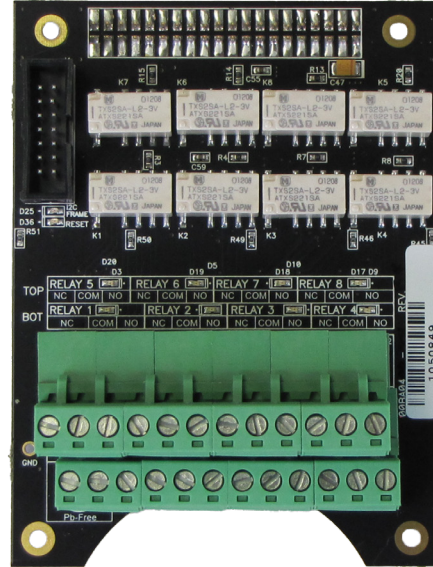

Regulatory Compliance

- CE
- FCC 47 CFR Part 15, Subpart B
- REACH

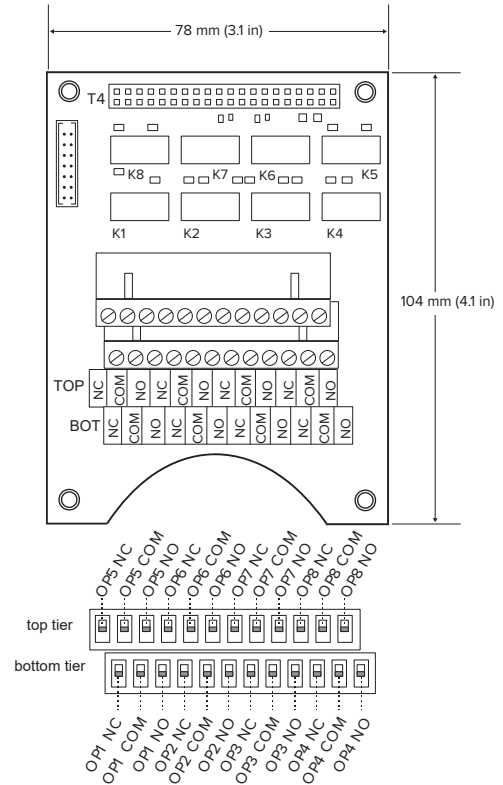

See the OmniTrax or XField Datasheet for a full system description.

info@senstar.com • senstar.com