

Dry-Contact Input Card

00BA1200

Description

The dry-contact input card provides eight additional auxiliary inputs to a compatible Senstar device, including the OmniTrax and XField processors. The mounting hardware (4 machine screws and offset posts) is included.



Not compatible with “Gen2” devices (FlexZone, Senstar LM100, FiberPatrol FP400 or UltraWave).

Specifications

- Inputs are programmable for supervision type, resistor value(s), and filtering
- Two removable dual-contact connectors
- Size: 78 x 104 x 31 mm (3.1 x 4.1 x 1.2 in)
- Weight: 131 g (4.6 oz)
- Operating temperature: -40 to 70 °C (-40 to 158 °F)
- Conformally coated

Regulatory Compliance

- CE
- FCC 47 CFR Part 15, Subpart B
- REACH

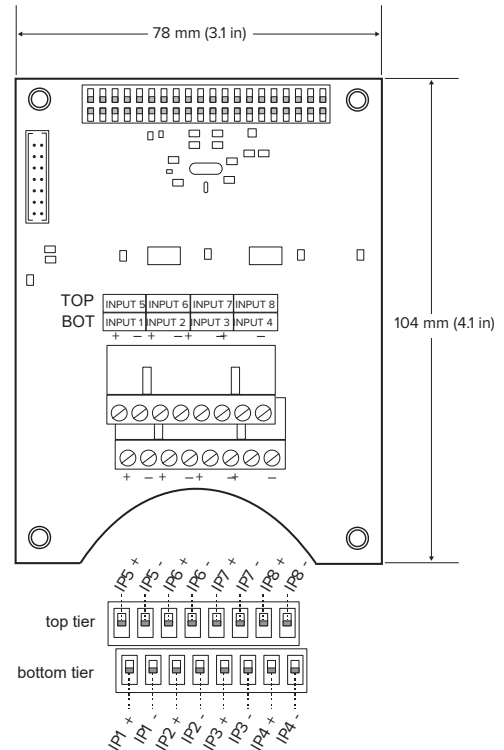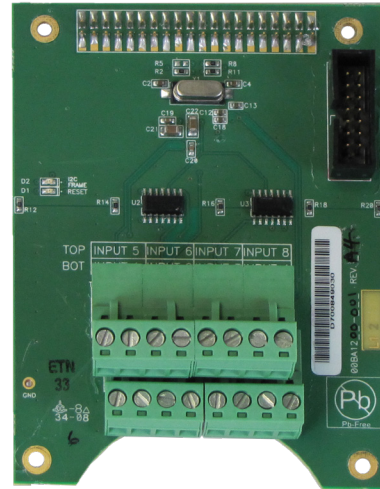

See the OmniTrax or XField Datasheet for a full system description.

info@senstar.com • senstar.com