

Silver Network Ethernet PoE Comm Card, 48 VDC Output


00BA2700

Description

The 00BA2700 Silver Network Ethernet card enables compatible perimeter sensor devices to communicate with the Senstar Network Manager software via an Ethernet connection. The card supports Power-over-Ethernet (PoE), enabling it to provide power to the device on which it is hosted.

The 00BA2700 can be installed on FlexZone, Senstar LM100, UltraWave, and UltraLink processors.

When installed on a FlexZone processor, the 00BA2700 provides sufficient output to power the host processor as well as to power two adjacent FlexZone processors over the sensor cable.

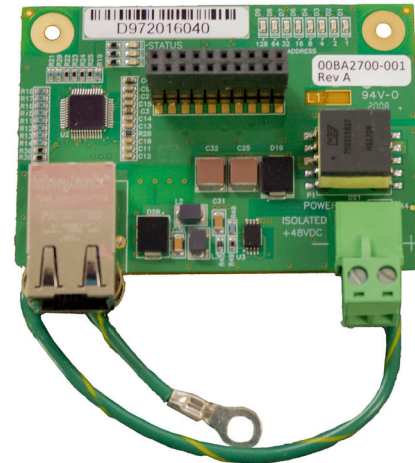


Specifications

- Ethernet specification: IEEE 802.3af
- Requires connection to Class 3 Power Sourcing Equipment (PSE) switch port
- Output power at host processor: 12W at 48VDC
- Media: CAT5
- Connectors:
 - Data: RJ-45
 - Power: 2-contact wire terminals
- Size: 76 x 65 x 22 mm (3.0 x 2.6 x 0.9 in)
- Weight: 47 g (1.65 oz)
- Operating temperature: -40 to 70 °C (-40 to 158 °F)

Regulatory Compliance:

- CE
- FCC
- REACH

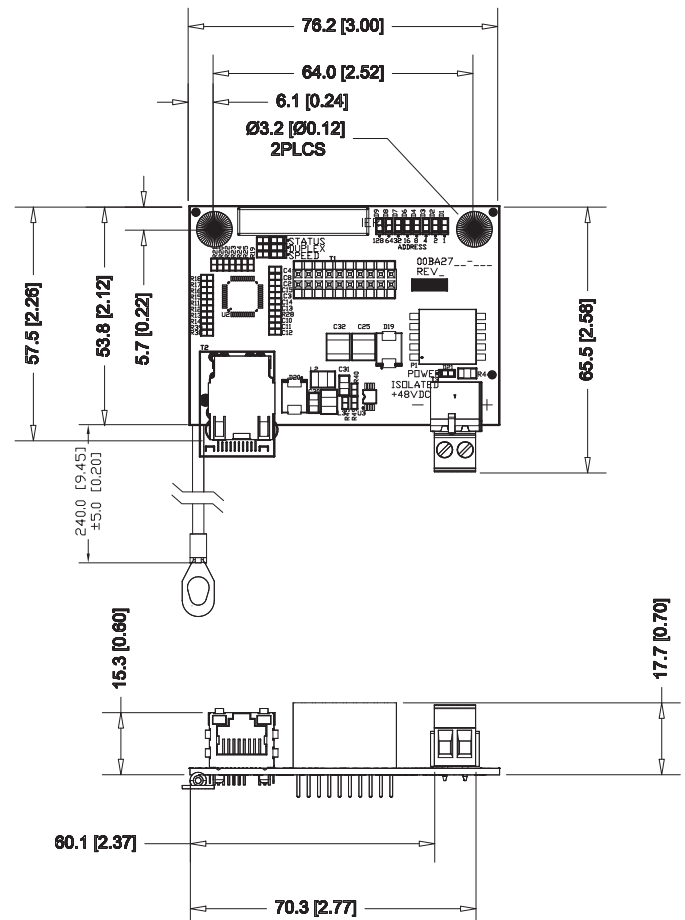

info@senstar.com • senstar.com